

BRIDH
ceramica



200 X 1200 MM



NAUNCE

SERIES



by

BRIDH
ceramica

BRIDH
ceramica

SOLUTION TO ALL
YOUR DESIGN NEEDS.

2 0 0 X

1 2 0 0 M M

THE FINEST WOODWORK FOR THE FINEST LIVING.

Experience the calmness and elegance
of nature from the comfort of your own home.
Discover the strength, textures, and tones
that wood has to offer. The collection of
200x1200mm tiles is everything different
you were looking for.



WOODS ARE FLOORING ARE WOODS.
WOODS ARE FLOORING ARE WOODS.
WOODS ARE FLOORING ARE WOODS.
WOODS ARE FLOORING ARE WOODS.
WOODS ARE FLOORING ARE WOODS.



FIND
CREATIVITY
FROM BASICS.



ITS
NAUNCE
SAND

GRIS

SAND



BRIDH
ceramica

NAUNCE GRIS

200X
1200MM

RANDOM
14



NAUNCE GRIS

200X
1200MM

RANDOM
14





BRIDH
ceramica

NAUNCE SAND

200X
1200MM

RANDOM
14




NAUNCE SAND

200X
1200MM

RANDOM
14



LAYING SOLUTIONS

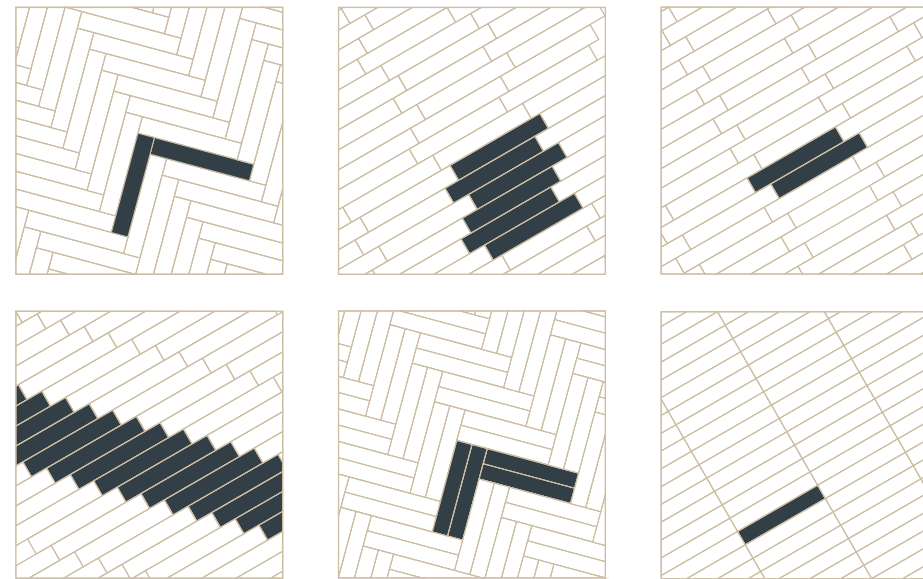


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

PORCELAIN STONWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	$\pm 0,3\%$, max 1 mm	In According	
		Thickness	$\pm 5\%$, max 0,5 mm	In According	
		Wedging	$\pm 0,3\%$, max 1,5 mm	In According	
		Straightness of the edges	$\pm 0,3\%$, max 0,8 mm	In According	
		Flatness	$\pm 0,4\%$, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	$\leq 0,5\%$	In According	
		Breaking strength	$S \geq 1300$ N	$S \geq 2000$ N	
		Modulus of rupture	$R \geq 35$ N/mm ²	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	9×10^{-4} max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



INSTALLATION ADVICE

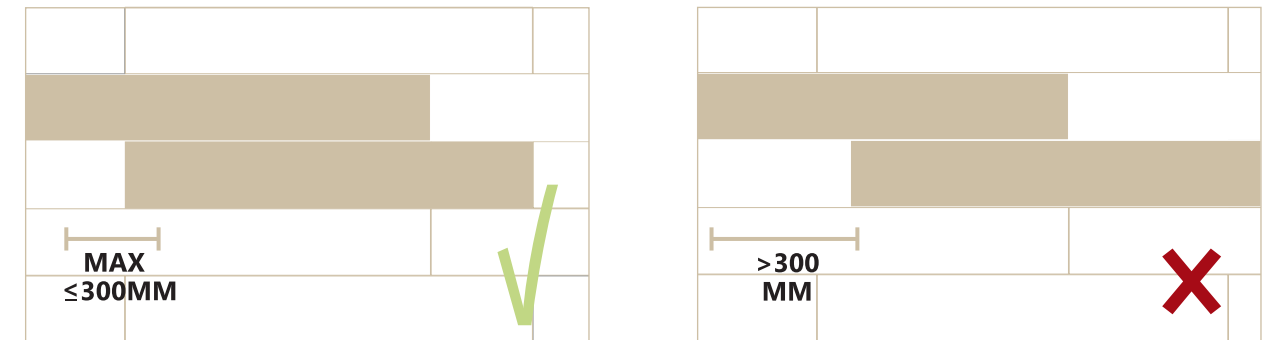

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES





DHAVAL BHATT
(Director)
+91 9702382809



BRIDH CERAMICA

Block No.2, Rameshwar Society, Sanala Road, Opp. GIDC,
Morbi - 363642. (Gujarat) INDIA.



dbhat16@gmail.com | dhaval@bridhceramica.com