







by






Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.



creativity from basics



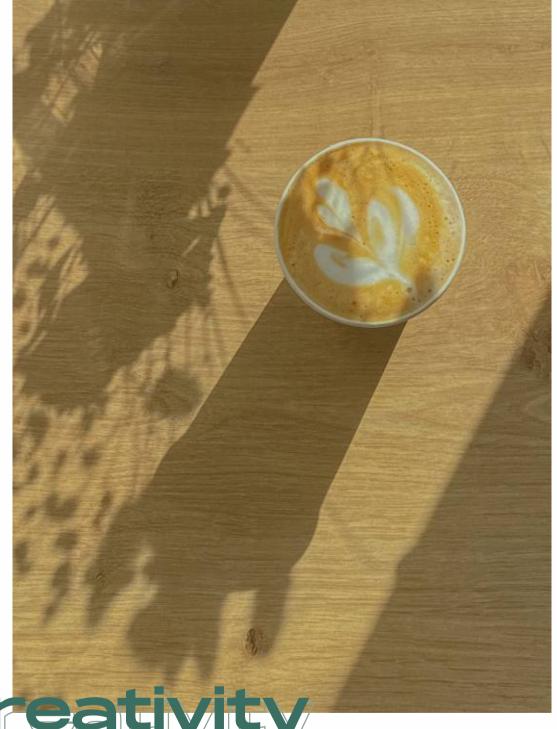

# creativity for your kitchen & living

### COLORS

**REAL WOOD ASH** 



REAL WOOD BIANCO



REAL WOOD NATURAL



**REAL WOOD MAHOGANY** 



**REAL WOOD OLIVE** 



**REAL WOOD PINE** 




**REAL WOOD TEAK** 





## REAL WOOD ASH

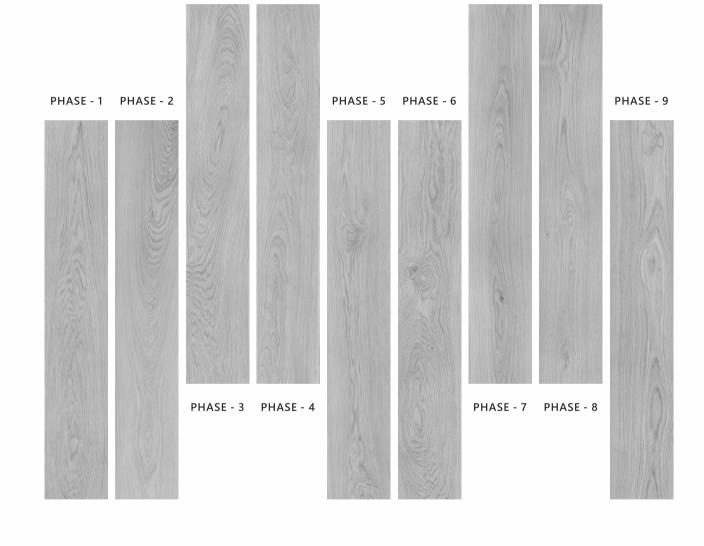














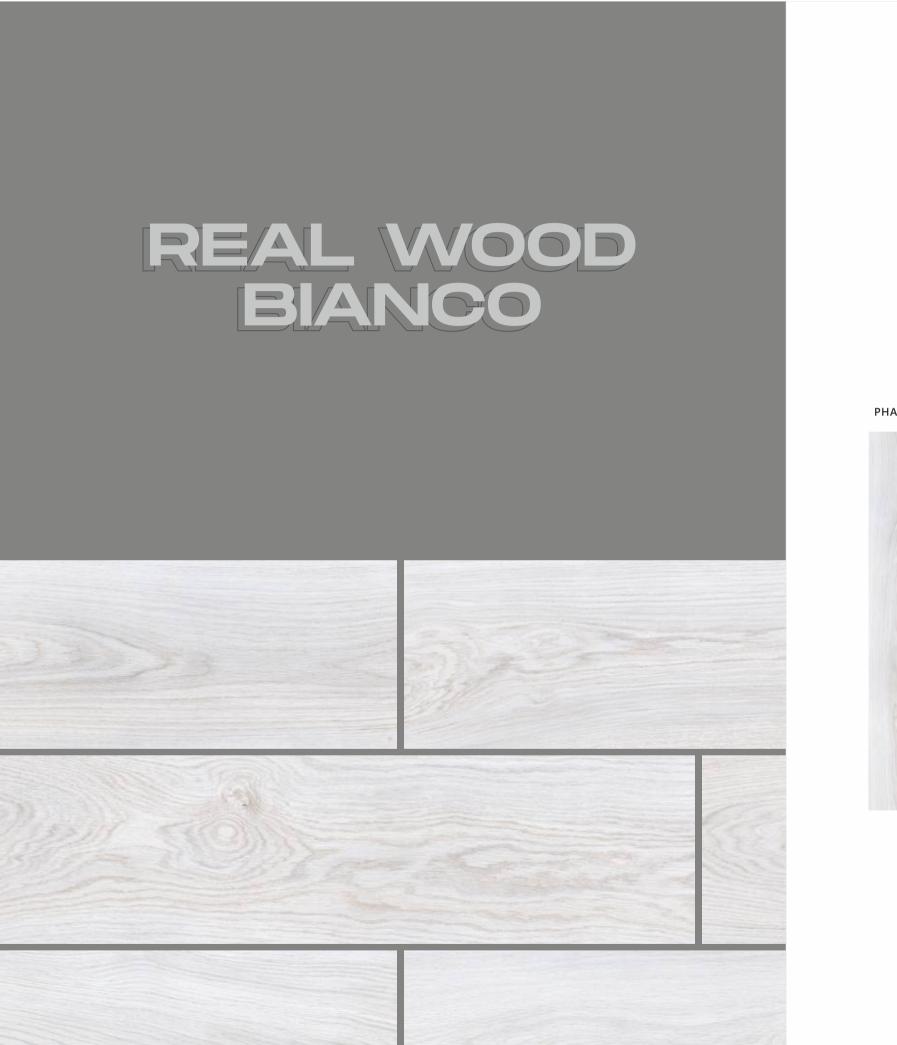















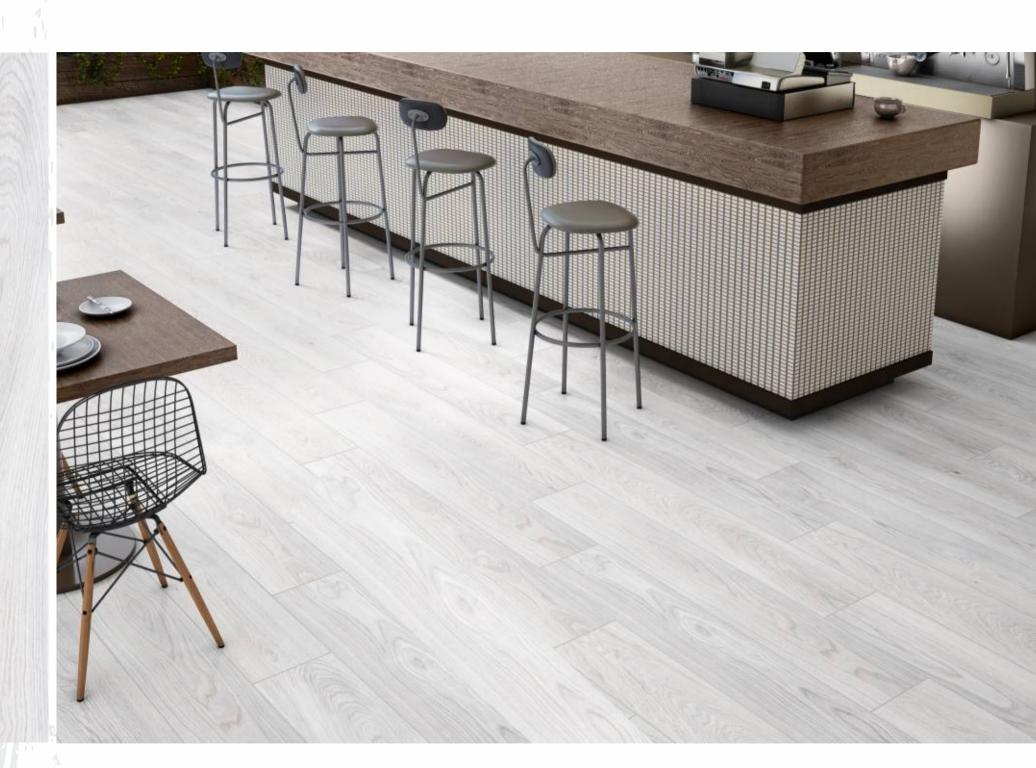

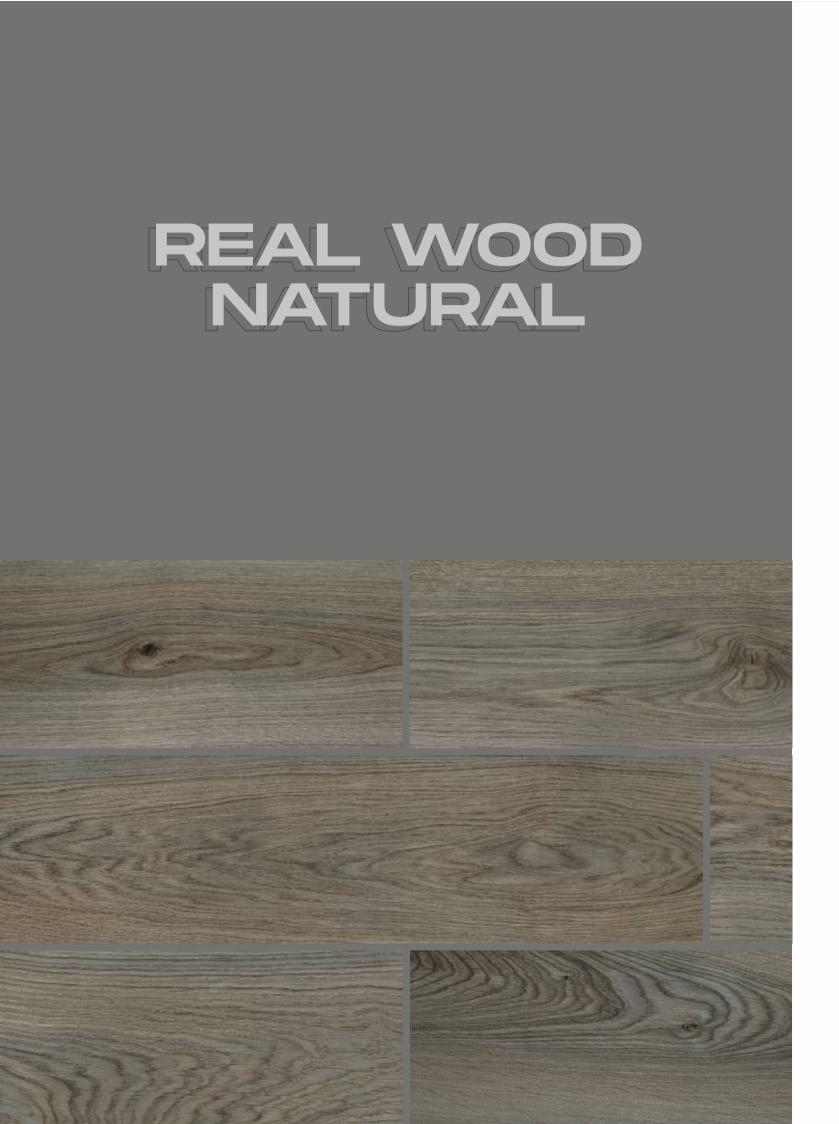




















### REAL WOOD MAHOGANY



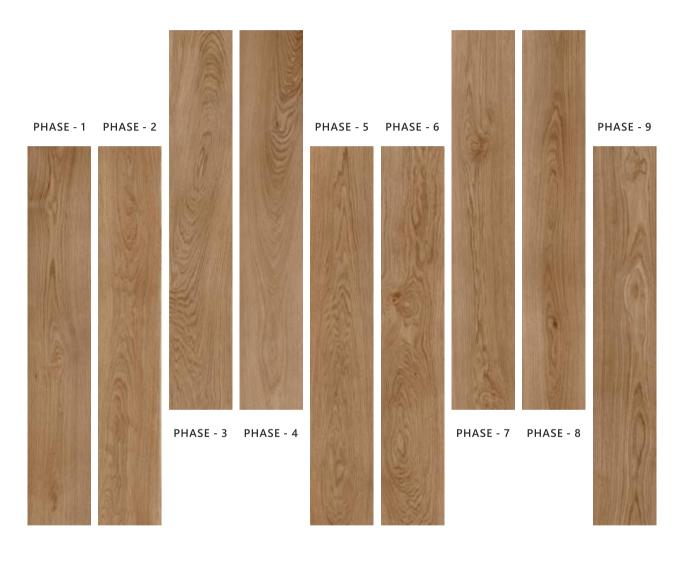
















# REAL WOOD OLIVE



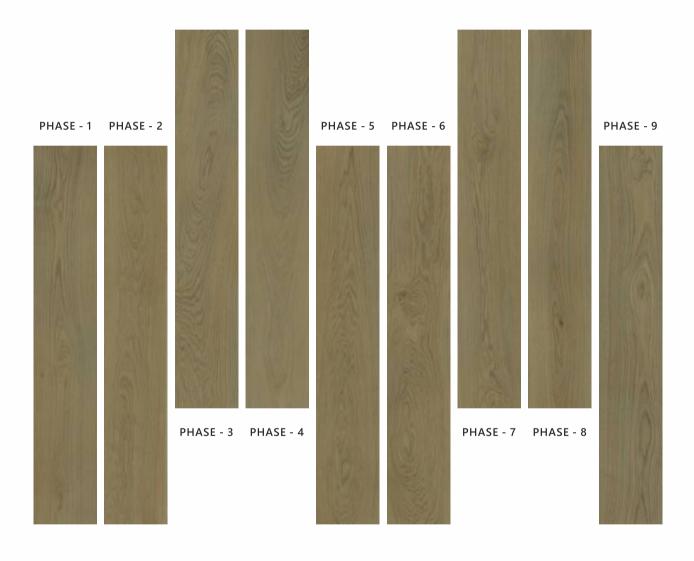
















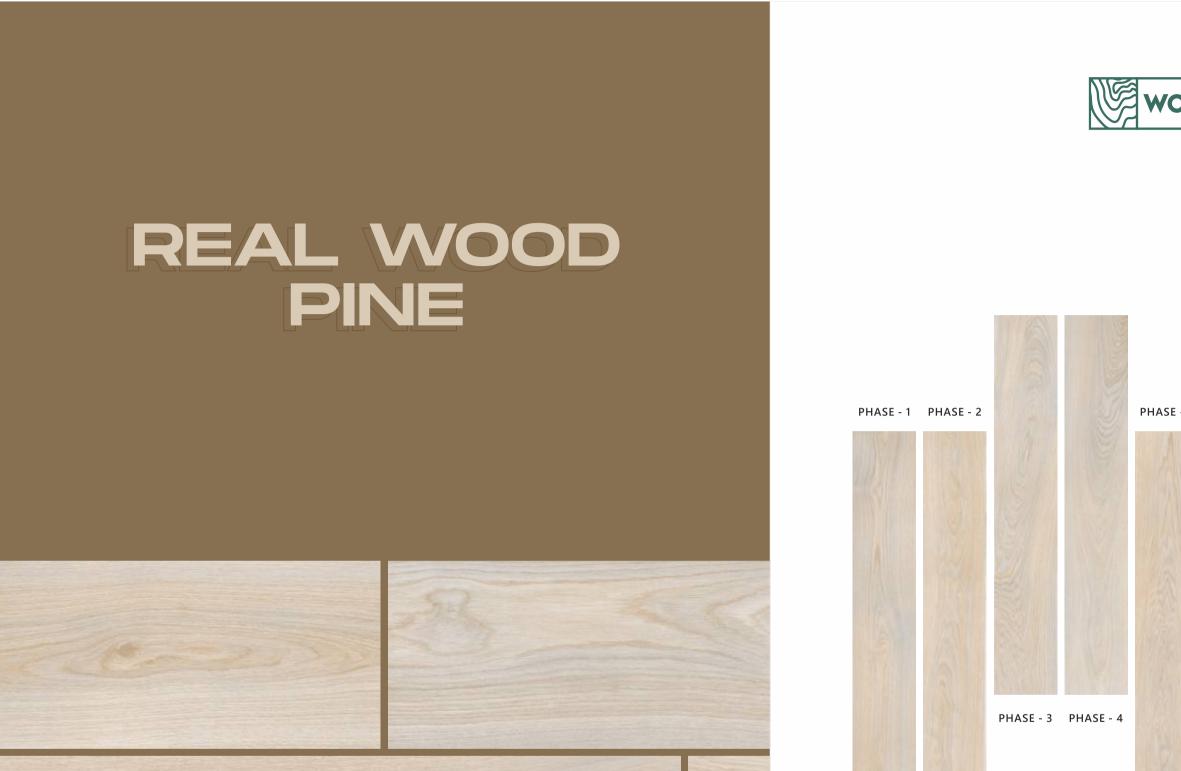














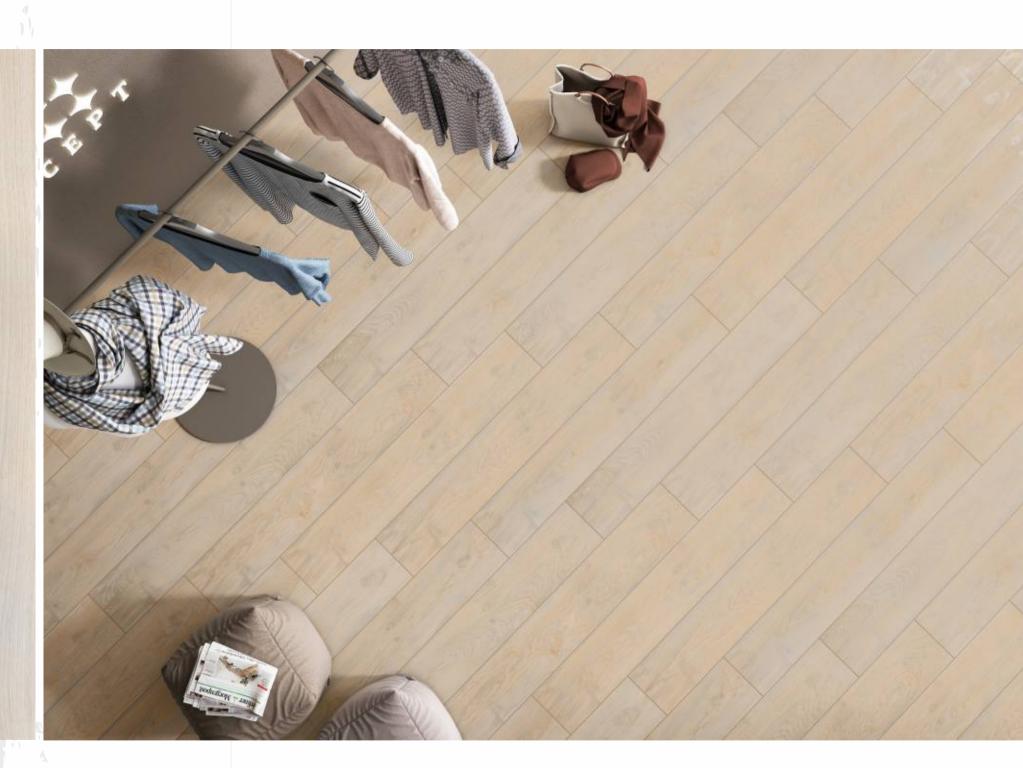






## REAL WOOD TEAK



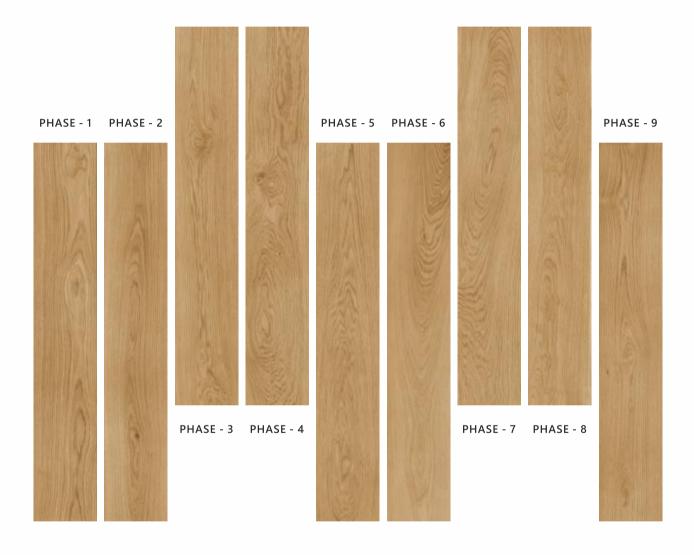
















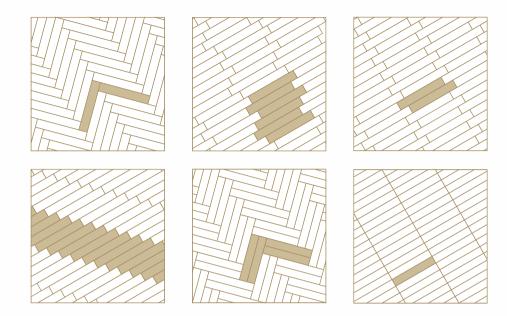

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


#### Porcelain stoneware - Standard EN 14411 (ISO 13006) **Annex G Group Bla, E ≤ 0.5%**


TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR Values
				RECTIFIED	MATT
DIMENSIONS		Length and width		<u>+</u> 0,3%, max 1 mm	In According
		Thickness		<u>+</u> 5%, max 0,5 mm	In According
		Wedging	ISO 10545-2	<u>+</u> 0,3%, max 1,5 mm	In According
		Straightness of the edges		<u>+</u> 0,3%, max 0,8 mm	In According
		Flatness		<u>+</u> 0,4%, max 1,8 mm	In According
STRUCTURE	• •	Water absorption – average value %	ISO 10545-3	<u>&lt;</u> 0,5%	In According
		Breaking strength	150 105 45 4	S≥ 1300 N	S <u>&gt;</u> 2000 N
		Modulus of rupter	ISO 10545-4	R≥ 35 N/mm²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicater by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 <sup>6</sup> max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE	•	Resistance to high concentrations of acids and alkalis		Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis	ISO 10545-13	Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5





#### **INSTALLATION ADVICE**





The longest side should be staggered no more than 300mm when laid in running bond.

#### **V SHADES**



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

#### **PACKAGING**

	SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200	x1200 mm	9 MM	5	1.20	12.91

#### **FEATURES**







RECTIFIED











\*We need minimum 2000sq/mtr order for R11 surface



DHAVAL BHATT (Director) +91 9702382809



#### **BRIDH CERAMICA**

Block No.2, Rameshwar Society, Sanala Road, Opp. GIDC, Morbi - 363642. (Gujarat) INDIA.



dbhat16@gmail.com | dhaval@bridhceramica.com