


THE EXPRESSIVE  
POWER OF  
WOOD



**BRIDH**  
ceramica

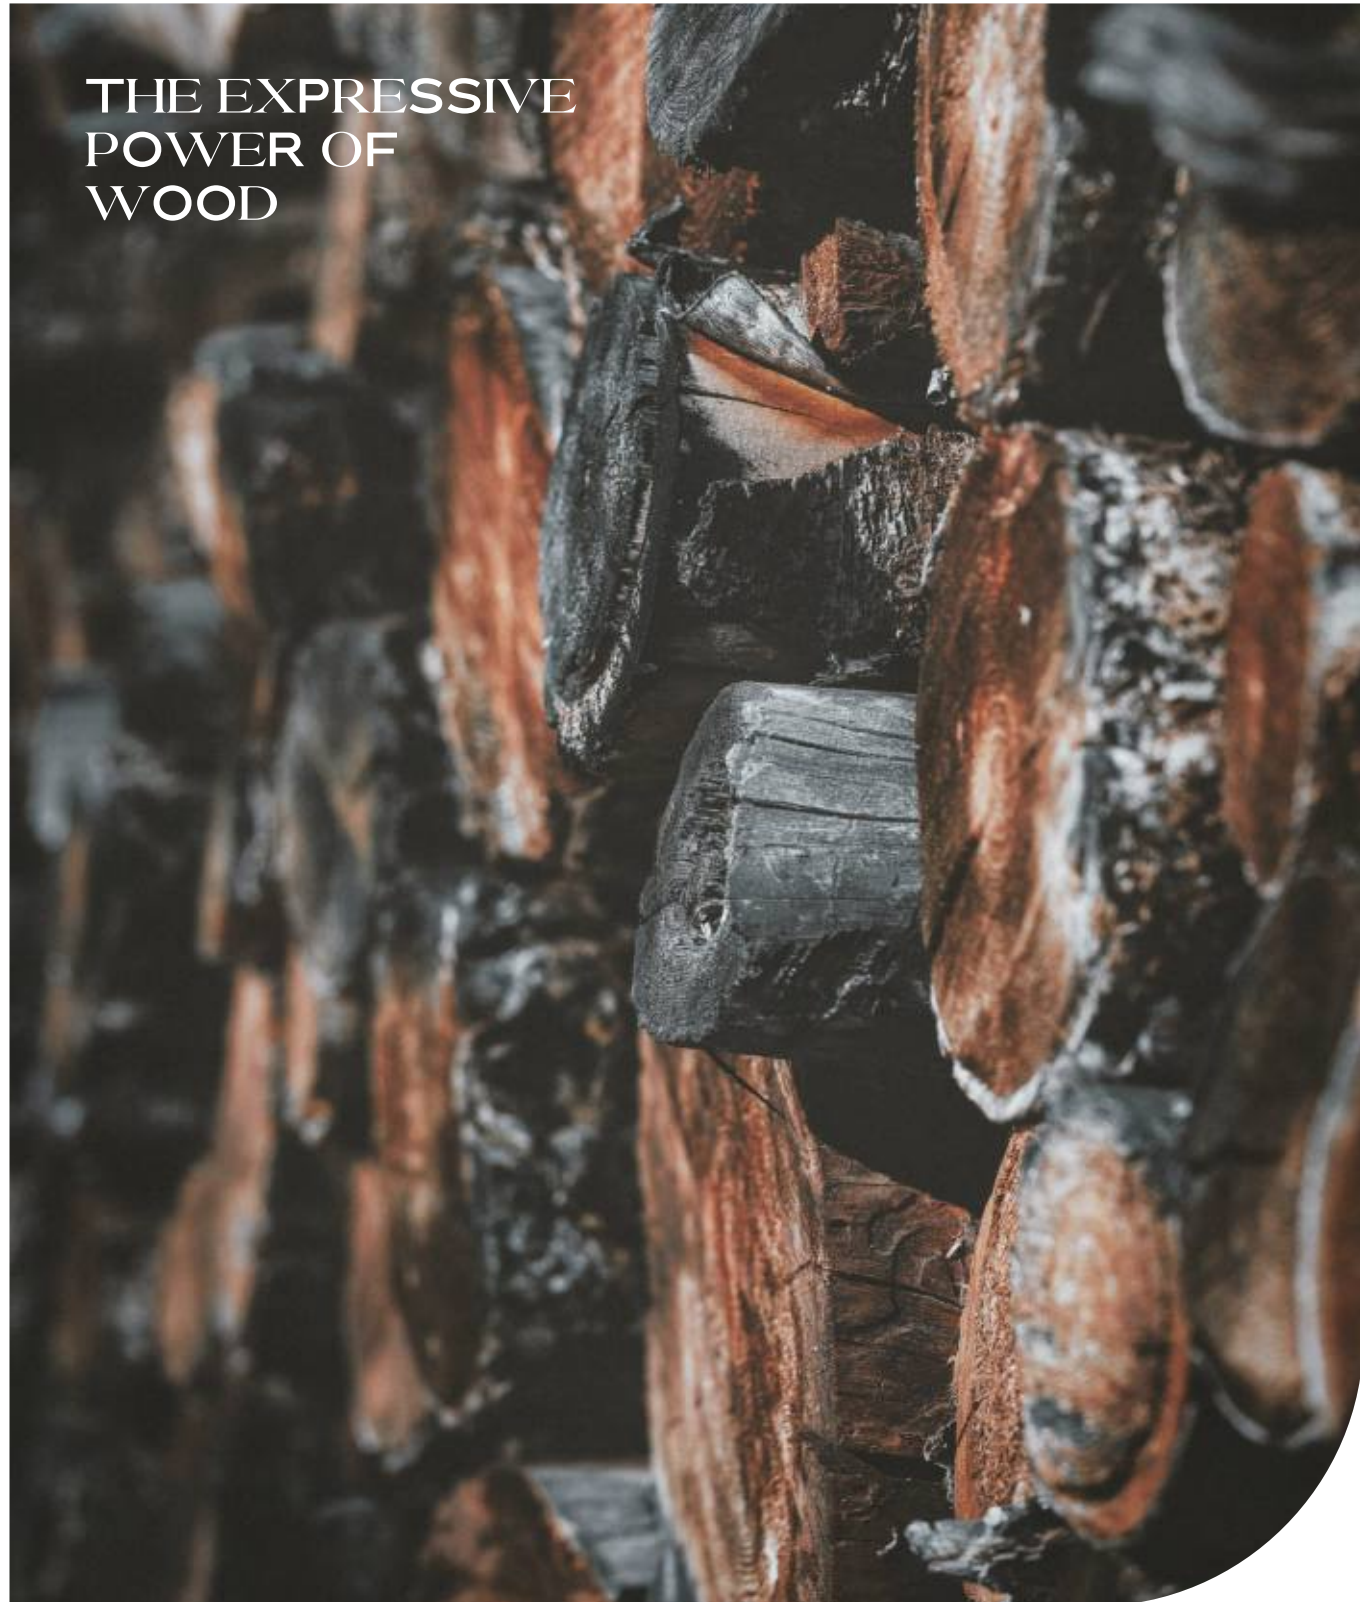

Collection 2024

# HAZY

SERIES

## 200X1200MM

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.

A NEW DIMENSION  
TO YOUR SPACE.











**SOLUTION TO  
ALL YOUR  
DESIGN NEEDS**



OUR COLLECTION. YOUR CREATION.

**HAZY**  
SERIES

**7**

AVAILABLE  
IN COLOR

AMBER

OAK

PINE

SANDLE

SILVER

TEAK

WALNUT







A NEW DIMENSION  
TO YOUR SPACE.

**HAZY AMBER**



# HAZY AMBER

Size  
**200x1200mm**  
20x120cm



**18**  
Random

Surface  
**Matt Punch**

HAZY  
SERIES







A NEW DIMENSION  
TO YOUR SPACE.

HAZY OAK



# HAZY OAK

Size  
**200x1200mm**  
20x120cm



**18**  
Random

Surface  
**Matt Punch**

HAZY  
SERIES







HAZY PINE



# HAZY PINE


Size  
**200x1200mm**  
20x120cm



**18**  
Random

Surface  
**Matt Punch**

HAZY  
SERIES

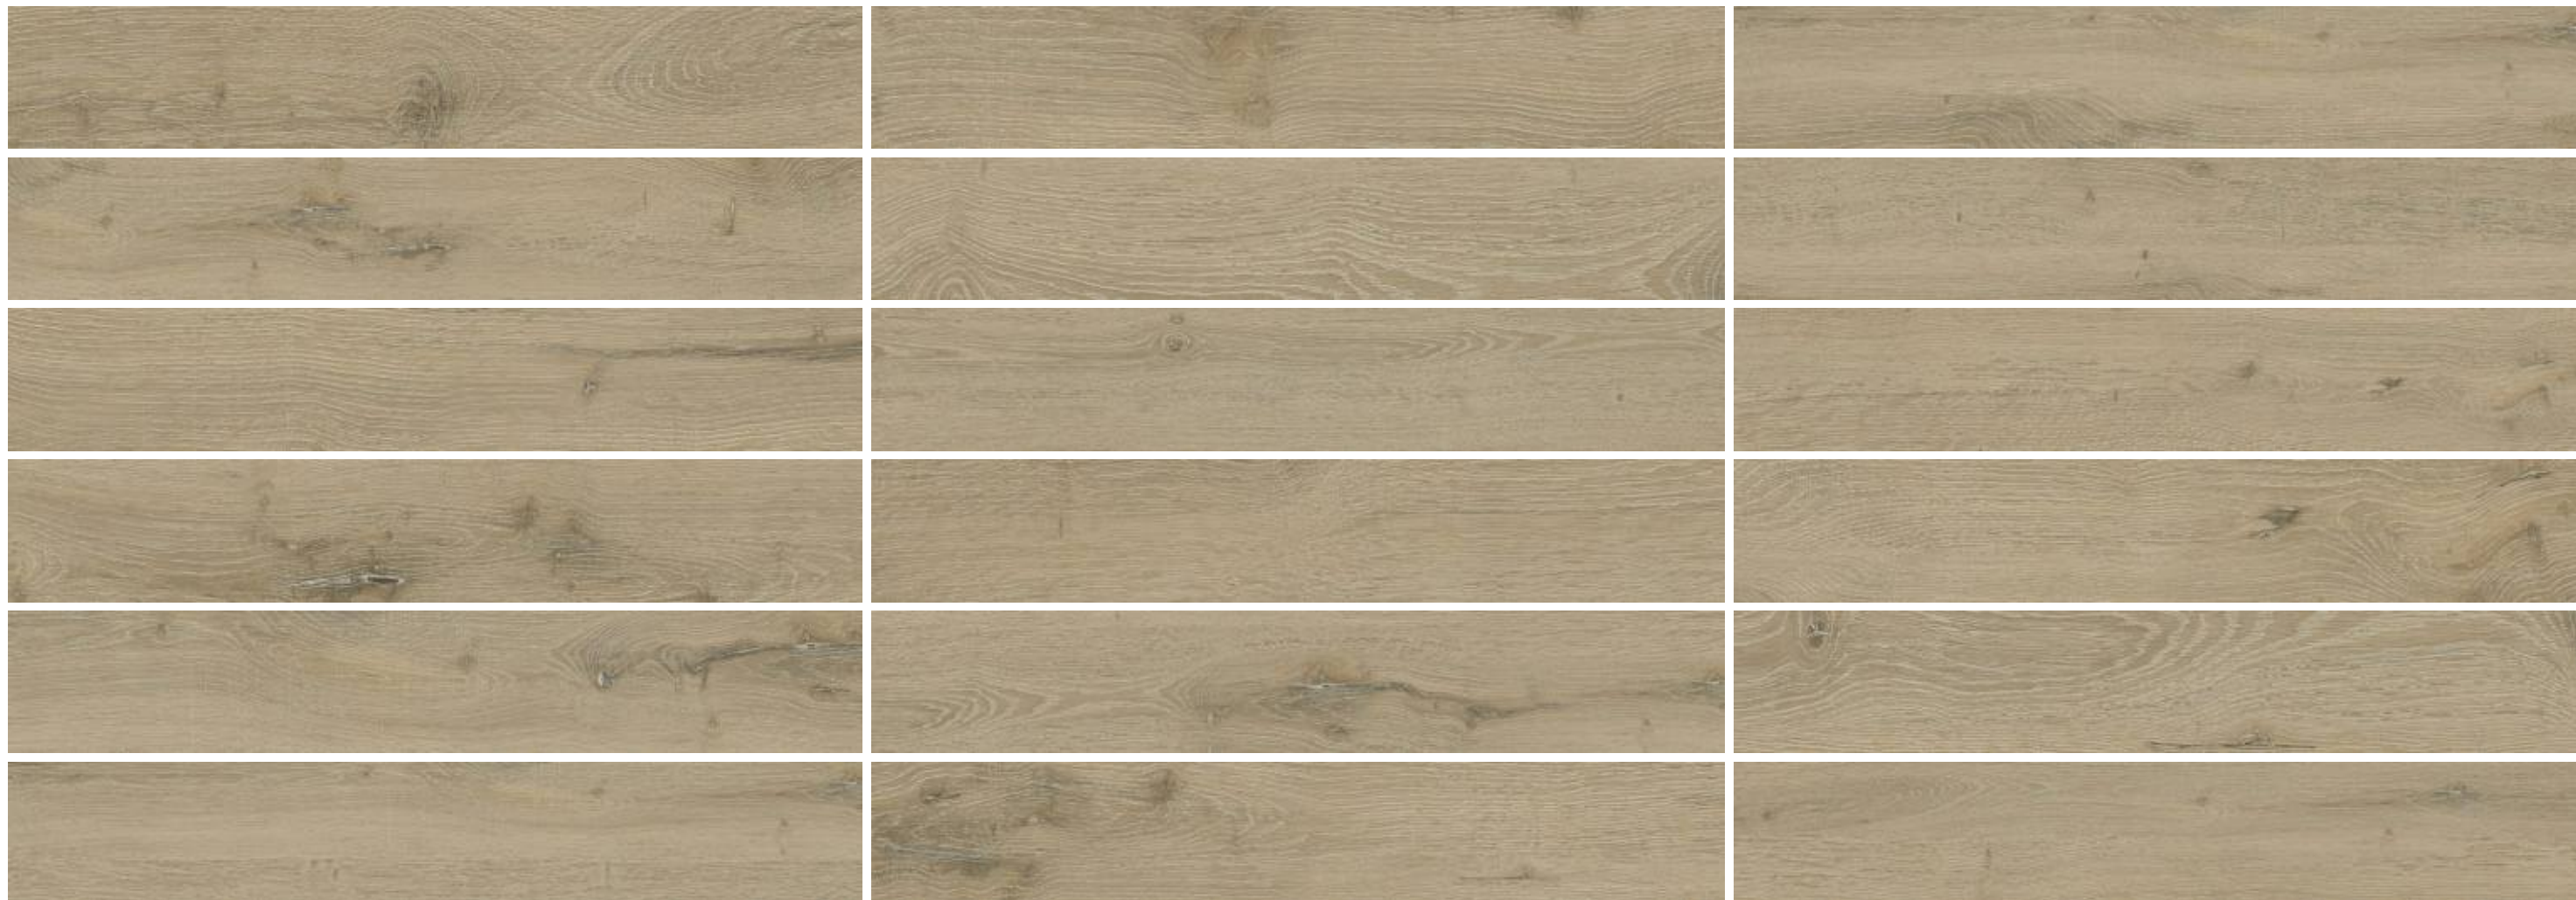





A NEW DIMENSION  
TO YOUR SPACE.

**HAZY SANDLE**



# HAZY SANDLE

Size  
**200x1200mm**  
20x120cm



**18**  
Random

Surface  
**Matt Punch**

HAZY  
SERIES







A NEW DIMENSION  
TO YOUR SPACE.

HAZY SILVER



# HAZY SILVER

Size  
**200x1200mm**  
20x120cm



**18**  
Random

Surface  
**Matt Punch**

HAZY  
SERIES







**HAZY TEAK**



# HAZY TEAK

Size  
**200x1200mm**  
20x120cm



**18**  
Random

Surface  
**Matt Punch**

HAZY  
SERIES







HAZY WALLNUT



# HAZY WALNUT

Size  
**200x1200mm**  
20x120cm



**18**  
Random


Surface  
**Matt Punch**

HAZY  
SERIES





## LAYING SOLUTIONS

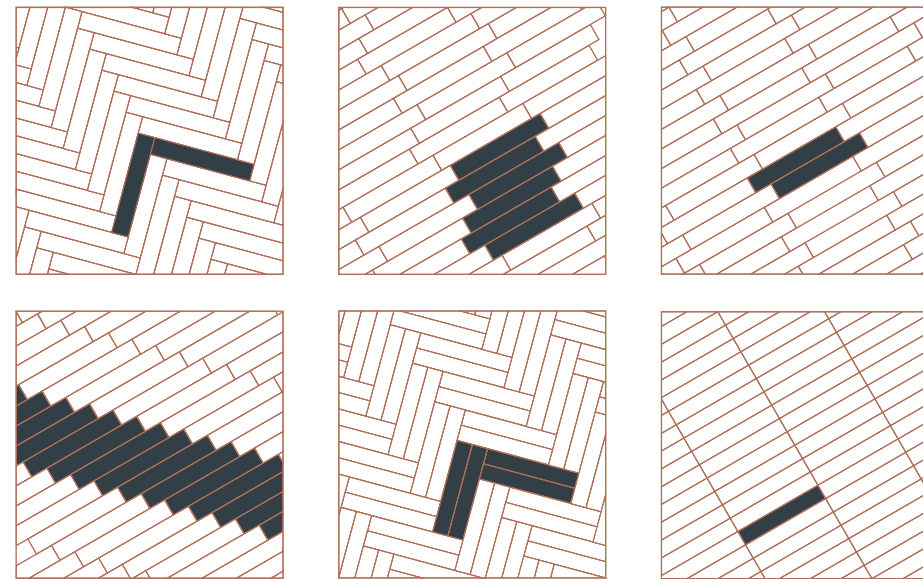


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

## PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	$\pm 0,3\%$ , max 1 mm	In According	
		Thickness	$\pm 5\%$ , max 0,5 mm	In According	
		Wedging	$\pm 0,3\%$ , max 1,5 mm	In According	
		Straightness of the edges	$\pm 0,3\%$ , max 0,8 mm	In According	
		Flatness	$\pm 0,4\%$ , max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	$\leq 0,5\%$	In According	
		Breaking strength	$S \geq 1300$ N	$S \geq 2000$ N	
		Modulus of rupture	$R \geq 35$ N/mm <sup>2</sup>	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	$9 \times 10^{-4}$ max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



## INSTALLATION ADVICE

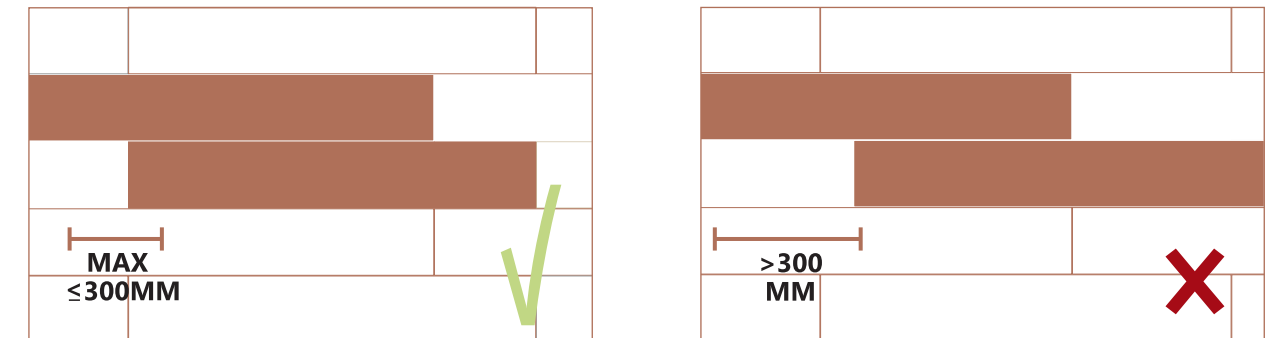

The longest side should be staggered no more than 300mm when laid in running bond.

## V SHADES




The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

## PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

## FEATURES

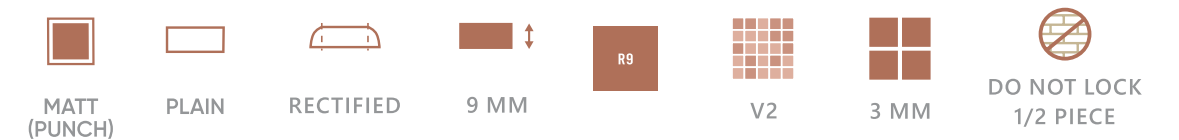





DHAVAL BHATT  
(Director)  
+91 9702382809



**BRIDH CERAMICA**

Block No.2, Rameshwar Society, Sanala Road, Opp. GIDC,  
Morbi - 363642. (Gujarat) INDIA.



dbhat16@gmail.com | dhaval@bridhceramica.com